

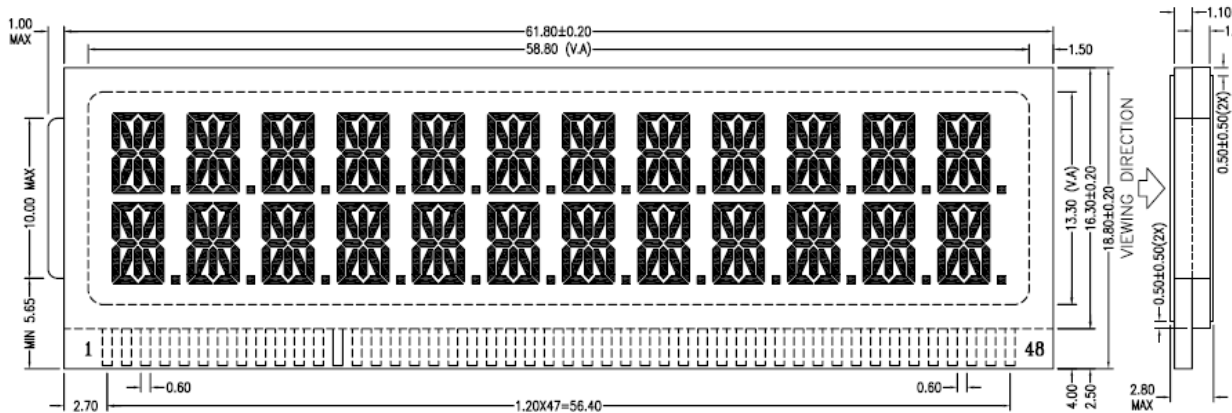


# PRODUCT SPECIFICATION

Part Number **PC2491-O**

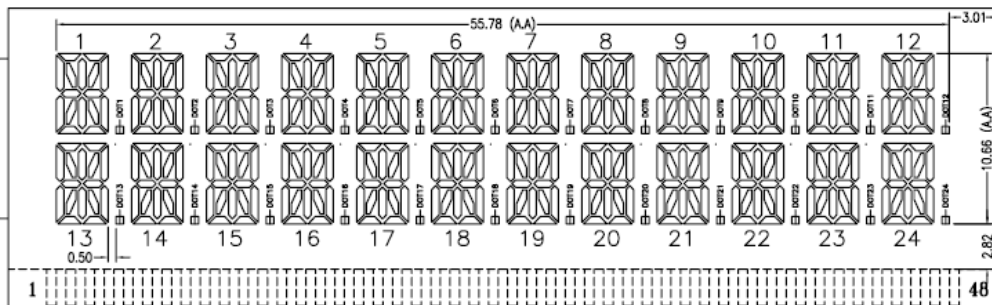

PIN NO.	IC NO.	C12	C11	C10	C9	C8	C7	C6	C5	C4	C3	C2	C1	PIN NO.	IC NO.	C12	C11	C10	C9	C8	C7	C6	C5	C4	C3	C2	C1
1	S36	1A	1F	1H	1G	1E	1D	13A	13F	13H	13G	13E	13D	25	S12	9A	9F	9H	9G	9E	9D	21A	21F	21H	21G	21E	21D
2	S35	1A1	1J	1I	1L	1M	1D	13A1	13J	13I	13L	13M	13D	26	S11	9A1	9J	9I	9L	9M	9D	21A1	21J	21I	21L	21M	21D
3	S34	---	1B	1K	1N	1C	20F1	---	13B	13K	13N	13C	DOT13	27	S10	---	9B	9K	9N	9C	DOT9	---	21B	21K	21N	21C	DOT21
4	S33	2A	2F	2H	2G	2E	2D	14A	14F	14H	14G	14E	14D	28	S9	10A	10F	10H	10G	10E	10D	22A	22F	22H	22G	22E	22D
5	S32	2A1	2J	2I	2L	2M	2D	14A1	14J	14I	14L	14M	14D	29	S8	10A1	10J	10I	10L	10M	10D	22A1	22J	22I	22L	22M	22D
6	S31	---	2B	2K	2N	2C	20F2	---	14B	14K	14N	14C	DOT14	30	S7	---	10B	10K	10N	10C	DOT10	---	22B	22K	22N	22C	DOT22
7	S30	3A	3F	3H	3G	3E	3D	15A	15F	15H	15G	15E	15D	31	S6	11A	11F	11H	11G	11E	11D	23A	23F	23H	23G	23E	23D
8	S29	3A1	3J	3I	3L	3M	3D	15A1	15J	15I	15L	15M	15D	32	S5	11A1	11J	11I	11L	11M	11D	23A1	23J	23I	23L	23M	23D
9	S28	---	3B	3K	3N	3C	20F3	---	15B	15K	15N	15C	DOT15	33	S4	---	11B	11K	11N	11C	DOT11	---	23B	23K	23N	23C	DOT23
10	S27	4A	4F	4H	4G	4E	4D	16A	16F	16H	16G	16E	16D	34	S3	12A	12F	12H	12G	12E	12D	24A	24F	24H	24G	24E	24D
11	S26	4A1	4J	4I	4L	4M	4D	16A1	16J	16I	16L	16M	16D	35	S2	12A1	12J	12I	12L	12M	12D	24A1	24J	24I	24L	24M	24D
12	S25	---	4B	4K	4N	4C	20F4	---	16B	16K	16N	16C	DOT16	36	S1	---	12B	12K	12N	12C	DOT12	---	24B	24K	24N	24C	DOT24
13	S24	5A	5F	5H	5G	5E	5D	17A	17F	17H	17G	17E	17D	37	C1	---	---	---	---	---	---	---	---	---	---	---	C1
14	S23	5A1	5J	5I	5L	5M	5D	17A1	17J	17I	17L	17M	17D	38	C2	---	---	---	---	---	---	---	---	---	---	---	C2
15	S22	---	5B	5K	5N	5C	20F5	---	17B	17K	17N	17C	DOT17	39	C3	---	---	---	---	---	---	---	---	---	---	---	C3
16	S21	6A	6F	6H	6G	6E	6D	18A	18F	18H	18G	18E	18D	40	C4	---	---	---	---	---	---	---	---	---	---	---	C4
17	S20	6A1	6J	6I	6L	6M	6D	18A1	18J	18I	18L	18M	18D	41	C5	---	---	---	---	---	---	---	---	---	---	---	C5
18	S19	---	6B	6K	6N	6C	20F6	---	18B	18K	18N	18C	DOT18	42	C6	---	---	---	---	---	---	---	---	---	---	---	C6
19	S18	7A	7F	7H	7G	7E	7D	19A	19F	19H	19G	19E	19D	43	C7	---	---	---	---	---	---	---	---	---	---	---	C7
20	S17	7A1	7J	7I	7L	7M	7D	19A1	19J	19I	19L	19M	19D	44	C8	---	---	---	---	---	---	---	---	---	---	---	C8
21	S16	---	7B	7K	7N	7C	20F7	---	19B	19K	19N	19C	DOT19	45	C9	---	---	---	---	---	---	---	---	---	---	---	C9
22	S15	8A	8F	8H	8G	8E	8D	20A	20F	20H	20G	20E	20D	46	C10	---	---	---	---	---	---	---	---	---	---	---	C10
23	S14	8A1	8J	8I	8L	8M	8D	20A1	20J	20I	20L	20M	20D	47	C11	---	---	---	---	---	---	---	---	---	---	---	C11
24	S13	---	8B	8K	8N	8C	20F8	---	20B	20K	20N	20C	DOT20	48	C12	---	---	---	---	---	---	---	---	---	---	---	C12

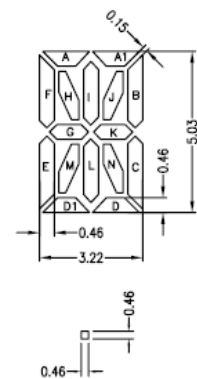

**NOTES:**

- |  |                             |
|--|-----------------------------|
| 1. DISPLAY TYPE: HTN                   | 5. OPERATING VOLTAGE: 4.8 V |
| 2. VIEWING DIRECTION: 6:00             | 6. OPERATING TEMP: 0°C~50°C |
| 3. POLARIZER MODE: POSITIVE/REFLECTIVE | 7. STORAGE TEMP: -10°C~60°C |
| 4. DRIVER METHOD: 1/12 DUTY 1/5 BIAS   | 8. CONNECTOR: ZEBRA         |

NOTE[●]: HAVE CROSSPOINTS IN V.A.(0.06mmX0.06mm)

<b>Customer Approval Signatures</b>	<b>Approved By</b>	<b>Checked By</b>	<b>Prepared By</b>

<b>Record Of Revisions</b>		
Rev.0 01.13.24	JAS	Layout Start
Rev.1 03.24.15	JAS	Logo update